

# Ultralok® Lip System Notched Corner Adapters

For Excavators



ESCO



Ultralok® left and right notched adapters

## ESCO now offers Ultralok corner adapters that are pre-notched for easier installation

ESCO® has extended the Ultralok product line with the introduction of U35, U40 and U45 notched corner adapters for excavators.

The smoother, consistent finish of the cast notched surface provides improved accuracy for welding corner adapters to buckets. Using Ultralok notched adapters eliminate the need to arc notches in adapters and grind the cut surfaces to fit bucket corners. Eliminating these maintenance steps increases worker safety.


[See Ultralok notched corner adapter specifications on next page.](#)

### New Ultralok notched adapters

- Faster and easier to install
- Better fit with smooth cast notched surfaces
- Eliminates need to arc adapter to fit bucket corners
- Increases worker safety

**Save up to 15 minutes  
per adapter of installation  
time by removing the  
need to cut notches.**

## Ultralok® Lip System Notched Corner Adapters for Excavators

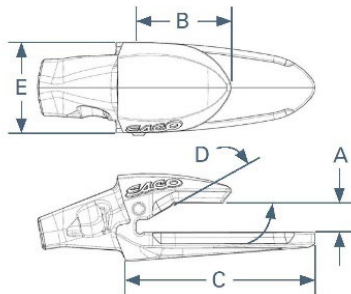

Top view of an Ultralok right notched adapter

| PMID      | Description              | Lip Thickness<br>A |      | Top Leg<br>B |      | Bottom Leg<br>C |       | Ramp Angle<br>D<br>deg | Adapter Width<br>E |      | Nose<br>Angle<br>deg | Weight |      |
|-----------|--------------------------|--------------------|------|--------------|------|-----------------|-------|------------------------|--------------------|------|----------------------|--------|------|
|           |                          | mm                 | in   | mm           | in   | mm              | in    |                        | mm                 | in   |                      | kg     | lb   |
| 5855-U35  | 1-1/2 Bottom Leg, Center | 40                 | 1.50 | 127          | 5.00 | 235             | 9.25  | 30                     | 115                | 4.53 | 10                   | 11.9   | 26.3 |
| 5855L-U35 | 1-1/2 Bottom Leg, Left   | 40                 | 1.50 | 127          | 5.00 | 235             | 9.25  | 30                     | 115                | 4.53 | 10                   | 11.9   | 26.3 |
| 5855R-U35 | 1-1/2 Bottom Leg, Right  | 40                 | 1.50 | 127          | 5.00 | 235             | 9.25  | 30                     | 115                | 4.53 | 10                   | 11.9   | 26.3 |
| 5856-U40  | 1-1/2 Bottom Leg, Center | 50                 | 2.00 | 145          | 5.71 | 264             | 10.39 | 30                     | 129                | 5.08 | 10                   | 17.2   | 38   |
| 5856L-U40 | 1-1/2 Bottom Leg, Left   | 50                 | 2.00 | 145          | 5.71 | 264             | 10.39 | 30                     | 129                | 5.08 | 10                   | 16.7   | 37   |
| 5856R-U40 | 1-1/2 Bottom Leg, Right  | 50                 | 2.00 | 145          | 5.71 | 264             | 10.39 | 30                     | 129                | 5.08 | 10                   | 16.7   | 37   |
| 5856-U45  | 1-1/2 Bottom Leg, Center | 50                 | 2.00 | 151          | 5.96 | 285             | 11.22 | 30                     | 144                | 5.67 | 10                   | 23     | 50   |
| 5856L-U45 | 1-1/2 Bottom Leg, Left   | 50                 | 2.00 | 151          | 5.96 | 285             | 11.22 | 30                     | 144                | 5.67 | 10                   | 22     | 48   |
| 5856R-U45 | 1-1/2 Bottom Leg, Right  | 50                 | 2.00 | 151          | 5.96 | 285             | 11.22 | 30                     | 144                | 5.67 | 10                   | 22     | 48   |